



4X150A

*Obsolete
4/62*~~4X150A~~

BEAM POWER TUBE

FORCED-AIR COOLED

Useful at frequencies up to 500 Mc

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage	6.0 ± 10%	ac or dc volts
Current at 6.0 volts	2.6	amp
Minimum heating time	30	sec
Mu-Factor, Grid No.2 to Grid No.1, for grid-No.2 volts = 300	50	
and grid-No.2 ma.	= 50	5

Direct Interelectrode Capacitances:^o


Grid No.1 to plate	0.02	μuf
Grid No.1 to cathode, grid No.2, and heater	16	μuf
Plate to cathode, grid No.2, and heater	4.2	μuf

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-15/32"
Maximum Seated Length	1.912"
Maximum Diameter	1.635"
Weight (Approx.)	5 oz
Radiator	Integral part of tube
Socket	Eimac 4X150A Air-System Socket, or equivalent
Base	Special 8-Pin

BOTTOM VIEW

Pin 1 - Grid No.2
 Pin 2 - Cathode
 Pin 3 - Heater
 Pin 4 - Cathode
 Pin 5 - Internal Connection - Do Not Use
 Pin 6 - Cathode



Pin 7 - Heater
 Pin 8 - Cathode
 Base Index Plug - Grid No.1
 Radiator - Plate Ring Surface Terminal ■ - Grid No.2

Air Flow:

Through Radiator—Under any condition, the air flow must be adequate to limit the temperature of the radiator to its specified maximum value. The airflow must be applied before or simultaneously with electrode voltages and may be removed simultaneously with them. Typical values of air flow for various plate dissipations are shown in the table below.

Percentage of Max. Rated

Plate Dissipation for

Each Class of Service	100	80	60	per cent
Minimum Air flow . . .	5.6	4.1	2.5	cfm
Static Pressure . . .	0.26	0.14	0.05	in. of water

[§] Because the cathode is subjected to considerable back bombardment as the frequency is increased with resultant increase in temperature, the heater voltage should be reduced depending on operating conditions and frequency to prevent overheating the cathode and resultant short life.

◆ For use at lower frequencies.

■ For use at higher frequencies.

^o: See next page.

← Indicates a change.



4X150A

BEAM POWER TUBE

To Base--Forced-air cooling of the base end of the tube must be provided to limit the temperature of the base seals to the specified value.

Through Eimac 4X150A Air System Socket--This fitting directs the air over the base seals, past the grid-No.2 seal and glass envelope, and through the radiator to provide effective cooling with minimum air flow. When the tube is operated at maximum plate dissipation, a minimum air flow of 7.5 cfm is required through the socket and radiator. The corresponding pressure drop is 0.6 inch of water. These requirements are for operation at sea level and at an ambient temperature of 20°C. At higher altitudes and ambient temperatures, the air flow must be increased and must be adequate to limit the radiator and seal temperatures to 150°C.

Radiator Temperature (Measured on metal

surface between radiator core and
glass envelope) 150 max. °C

Temperature of Base Seals and Envelope Seals. 150 max. °C

AF POWER AMPLIFIER & MODULATOR - Class AB♦

Maximum CCS* Ratings, Absolute Values:

DC PLATE VOLTAGE.	1250	max. volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE.	400	max. volts
MAX.-SIGNAL DC PLATE CURRENT*.	250	max. ma
PLATE DISSIPATION*.	150	max. watts
GRID-No.2 DISSIPATION*.	12	max. watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode . .	150	max. volts
Heater positive with respect to cathode . .	150	max. volts

Typical Operation:

Values are for 2 tubes

DC Plate Voltage.	600	800	1000	1250	volts
DC Grid-No.2 Voltage. . .	300	300	300	300	volts
DC Grid-No.1 (Control-Grid) Voltage	-44	-47	-47	-48	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage . . .	88	94	94	96	volts
Zero-Signal DC Plate Current	160	120	120	115	ma
Max.-Signal DC Plate Current	380	380	380	390	ma
Zero-Signal DC Grid-No.2 Current.	0	0	0	0	ma
Max.-Signal DC Grid-No.2 Current.	65	65	60	40	ma

♦ Subscript 1 indicates that grid-No.1 current does not flow during any part of the input cycle.

♦, *, *: See next page.

→ Indicates a change.



4X150A

4X150A

BEAM POWER TUBE

Effective Load Resistance (Plate to plate)	3550	4625	5850	7200	ohms
Max.-Signal Driving Power (Approx.)	0	0	0	0	watts
Max.-Signal Power Output (Approx.)	140	195	240	310	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance (Per tube)	0.1 max.	megohm
---	----------	--------

AF POWER AMPLIFIER & MODULATOR - Class AB₂[#]

Maximum CCS* Ratings, Absolute Values:

DC PLATE VOLTAGE	1250	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE	400	max.	volts
MAX.-SIGNAL DC PLATE CURRENT*	250	max.	ma
PLATE DISSIPATION*	150	max.	watts
GRID-No.2 DISSIPATION*	12	max.	watts
GRID-No.1 (CONTROL-GRID) DISSIPATION.	2	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode	150	max.	volts
Heater positive with respect to cathode	150	max.	volts

Typical Operation:

Values are for 2 tubes

DC Plate Voltage	600	800	1000	1250	volts
DC Grid-No.2 Voltage	300	300	300	300	volts
DC Grid-No.1 Voltage	-41	-43	-43	-44	volts
Peak AF Grid-No.1-to-Grid-No.1 Voltage.	94	96	98	100	volts
Zero-Signal DC Plate Current.	185	160	165	180	ma
Max.-Signal DC Plate Current.	485	490	495	475	ma
Zero-Signal DC Grid-No.2 Current	0	0	0	0	ma
Max.-Signal DC Grid-No.2 Current	80	75	70	65	ma
Effective Load Resistance (Plate to plate)	2600	3500	4600	5600	ohms
Max.-Signal Driving Power (Approx.)	0.15	0.15	0.15	0.15	watt
Max.-Signal Power Output (Approx.)	170	240	315	425	watts

* Averaged over any audio-frequency cycle of sine-wave form.

Subscript 2 indicates that grid-No.1 current flows during some part of the input cycle.

○, ●: See next page.

← Indicates a change.

4X150A



4X150A

BEAM POWER TUBE

RF POWER AMPLIFIER - Class B Television Service

Synchronizing-level conditions per tube unless otherwise specified

Maximum CCS® Ratings, Absolute Values:

54 to 216 Mc

DC PLATE VOLTAGE	1250	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE . . .	400	max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE . . .	-250	max.	volts
DC PLATE CURRENT (AVERAGE)*	250	max.	ma
PLATE DISSIPATION	150	max.	watts
GRID-No.2 DISSIPATION	12	max.	watts
GRID-No.1 DISSIPATION	2	max.	watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	150	max.	volts
Heater positive with respect to cathode.	150	max.	volts

Typical Operation (With bandwidth of 5 Mc):

DC Plate Voltage	750	1000	1250	volts
DC Grid-No.2 Voltage . . .	300	300	300	volts
DC Grid-No.1 Voltage . . .	-60	-65	-70	volts
Peak RF Grid-No.1 Voltage:				
Synchronizing level . . .	85	95	100	volts
Pedestal level	65	70	75	volts
DC Plate Current:				
Synchronizing level . . .	335	330	305	ma
Pedestal level	245	240	230	ma
DC Grid-No.2 Current:				
Synchronizing level . . .	50	45	45	ma
Pedestal level	20	15	10	ma
DC Grid-No.1 Current:				
Synchronizing level . . .	15	20	25	ma
Pedestal level	4	4	4	ma
Driver Power Output (Approx.):*				
Synchronizing level . . .	7	8	9	watts
Pedestal level	4.25	4.7	5.5	watts
Useful Power Output (Approx.):				
Synchronizing level . . .	135	200	250	watts
Pedestal level	75	110	140	watts

PLATE-MODULATED RF POWER AMPLIFIER -- Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

Maximum CCS® Ratings, Absolute Values:

Up to 500 Mc

DC PLATE VOLTAGE	1000	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE . . .	300	max.	volts

* Averaged over any frame.

*, *, &: See next page.

→ Indicates a change.



4X150A

4X150A

BEAM POWER TUBE

DC GRID-No.1 (CONTROL-GRID) VOLTAGE . . .	-250	max.	volts
DC PLATE CURRENT	200	max.	ma
PLATE DISSIPATION	100	max.	watts
GRID-No.2 DISSIPATION	12	max.	watts
GRID-No.1 DISSIPATION	2	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode . .	150	max.	volts
Heater positive with respect to cathode . .	150	max.	volts

Typical Operation at Frequencies up to 165 Mc:

DC Plate Voltage.	400	600	800	1000	volts
DC Grid-No.2 Voltage (Modulated approx. 55%)▲ . .	250	250	250	250	volts
DC Grid-No.1 Voltage.	-90	-95	-100	-105	volts
Peak AF Grid-No.2 Voltage (For 100% modulation)	140	150	160	170	volts
Peak RF Grid-No.1 Voltage . .	110	120	120	125	volts
DC Plate Current.	200	200	200	200	ma
DC Grid-No.2 Current.	40	35	25	20	ma
DC Grid-No.1 Current (Approx.)	7	8	10	15	ma
Driving Power (Approx.)	1	1	1.5	2	watts
Power Output (Approx.).	55	80	100	140	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance.	25000	max.	ohms
---------------------------------------	-------	------	------

RF POWER AMPLIFIER & OSCILLATOR - Class C Telegraphy
and

RF POWER AMPLIFIER - Class C FM Telephony

Maximum CCS® Ratings, Absolute Values:

Up to 500 Mc

DC PLATE VOLTAGE.	1250	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE.	300	max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE	-250	max.	volts
DC PLATE CURRENT.	250	max.	ma
PLATE DISSIPATION	150	max.	watts
GRID-No.2 DISSIPATION	12	max.	watts
GRID-No.1 DISSIPATION	2	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode . .	150	max.	volts
Heater positive with respect to cathode . .	150	max.	volts

▲ The dc grid-No.2 voltage must be modulated approximately 55% in phase with the plate modulation in order to obtain 100% modulation of the 4X150A. The use of a series grid-No.2 resistor or reactor may not give satisfactory performance and is therefore not recommended.

● Continuous Commercial Service.

† Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

○, ▲: See next page.

→ Indicates a change.



4X150A

BEAM POWER TUBE

Typical Operation at Frequencies up to 165 Mc:

DC Plate Voltage	600	750	1000	1250	volts
DC Grid-No.2 Voltage	250	250	250	250	volts
DC Grid-No.1 Voltage	-75	-80	-80	-90	volts
Peak RF Grid-No.1 Voltage. .	91	96	95	106	volts
DC Plate Current	200	200	200	200	ma
DC Grid-No.2 Current	37	37	31	20	ma
DC Grid-No.1 Current (Approx.).	11	11	10	11	ma
Driving Power (Approx.). . .	1	1	1	1.2	watts
Power Output (Approx.) . . .	85	110	150	195	watts

Typical Operation at Frequency of 500 Mc with Coaxial Cavity:

DC Plate Voltage	600	800	1000	1250	volts
DC Grid-No.2 Voltage	250	250	250	280	volts
DC Grid-No.1 Voltage	-110	-110	-110	-115	volts
DC Plate Current	170	200	200	200	ma
DC Grid-No.2 Current	6	7	7	5	ma
DC Grid-No.1 Current (Approx.).	6	10	10	10	ma
Driver Power Output (Approx.).	15	20	25	30	watts
Useful Power Output (Approx.).	50	95	120	140	watts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	25000	max.	ohms
--	-------	------	------

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1,5	2.3	2.9	amp
Direct Interelectrode Capacitances: ^o				
Grid No.1 to plate	-	-	0.06	$\mu\mu f$
Grid No.1 to cathode, grid No.2, and heater. . .	-	14.2	17.2	$\mu\mu f$
Plate to cathode, grid No.2, and heater	-	3.8	4.8	$\mu\mu f$
Grid-No.1 Voltage.	1,2,5,6	-30	-46	volts
Grid-No.2 Current.	1,2,5,6	-7	+3	ma
Mu-Factor, Grid No.2 to Grid No.1.	1,3,5,6	4	6	
Power Output	4,5,6	100	-	watts

^o With cylindrical shield having inside diameter of 1-13/16" completely surrounding radiator, and insulated from the top and sides of it by a 1/16" thickness of insulating material; and with a cylindrical shield having inside diameter of 1.460" and length of 5/16" surrounding the grid-No.2 ring terminal and insulated from it. Both shields are connected to ground.

•, Notes 1 to 6: See next page.

→ Indicates a change.



4X150A

4X150A


BEAM POWER TUBE

- Note 1: With 6.0 volts on heater.
- Note 2: With dc plate voltage of 1000 volts, dc grid-No.2 voltage of 300 volts, grid-No.1 voltage adjusted to give plate current of 150 ma.
- Note 3: With dc grid-No.2 voltage of 300 volts, and grid-No.2 current of 50 ma.
- Note 4: With heater voltage of 5.5 volts and with dc plate voltage of 1000 volts, dc grid-No.2 voltage of 250 volts, dc grid-No.1 bias of -90 volts, dc grid-No.1 current of 20 ma. maximum, grid-No.1 signal voltage adjusted to produce dc plate current of 200 ma., and a frequency of 475 Mc.
- Note 5: With Forced-Air Cooling as specified under GENERAL DATA.
- Note 6: Heater voltage must be applied for at least 30 seconds before application of other voltages.
- The driver stage is required to supply tube losses and rf circuit losses. The driver stage should be designed to provide an excess of power above the indicated values to take care of variations in line voltage, in components, in initial tube characteristics, and in tube characteristics during life.

MAXIMUM RATINGS vs OPERATING FREQUENCY

FREQUENCY	500	Mc
MAXIMUM PERMISSIBLE PERCENTAGE OF MAXIMUM RATED PLATE VOLTAGE AND PLATE INPUT:		
Class C Telegraphy	100	%

TYPICAL CHARACTERISTICS

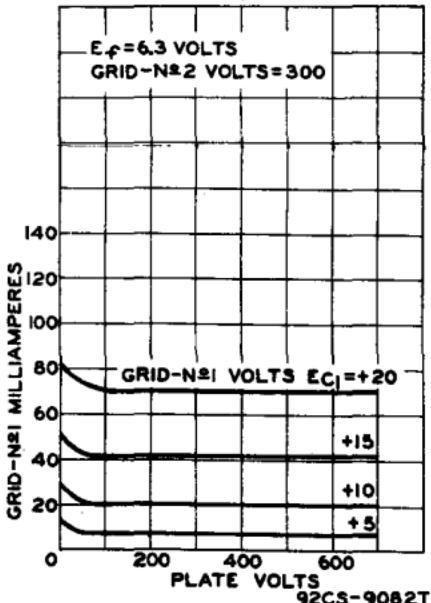


← Indicates a change.

4X150A



4X150A

BEAM POWER TUBE

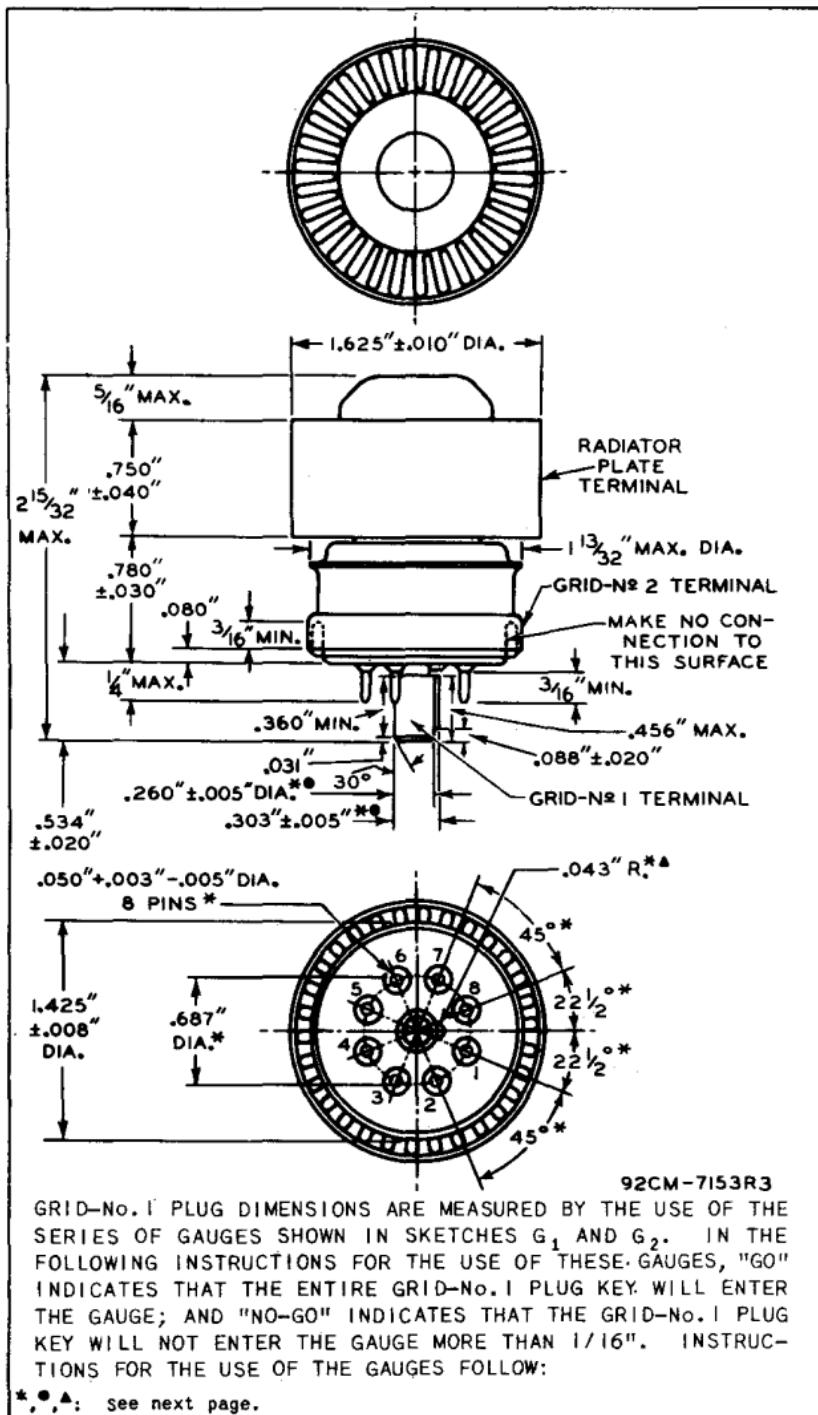

BEAM POWER TUBE

▲ GAUGES G₁-1, G₁-2, G₁-3, AND G₁-4:


USING ONLY SLOT C, TRY THESE GAUGES IN NUMERICAL ORDER UNTIL ONE IS FOUND THAT WILL ACCEPT THE ENTIRE GRID-NO. I PLUG. USING THE FIRST GAUGE THUS FOUND, IT WILL NOT BE POSSIBLE TO INSERT THE GRID-NO. I PLUG IN SLOT B.

● GAUGES G₂-1, G₂-2, AND G₂-3:

THE GRID-NO. I PLUG WILL BE REJECTED BY GAUGES G₂-1 AND G₂-2, BUT WILL BE ACCEPTED BY GAUGE G₂-3.


* BASE-PIN POSITIONS ARE HELD TO TOLERANCES SUCH THAT THE ENTIRE LENGTH OF THE PINS WILL, WITHOUT UNDUE FORCE, PASS INTO AND DISENGAGE FROM THE FLAT-PLATE GAUGE SHOWN IN SKETCH G₃.

GAUGE SKETCH G₁

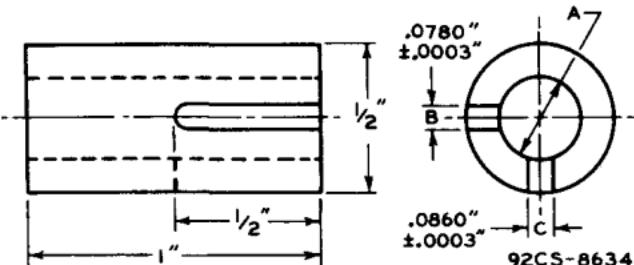

Gauge	Dimension A
G ₁ -1	.2575" + .0000" - .0005"
G ₁ -2	.2600" + .0000" - .0005"
G ₁ -3	.2625" + .0000" - .0005"
G ₁ -4	.2650" + .0000" - .0005"

GAUGE SKETCH G₂

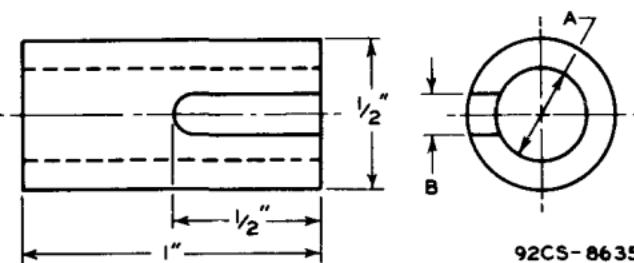


4X150A



4X150A

BEAM POWER TUBE

Gauge	Dimension	
	A	B
G ₂ -1	.2550" + .0000" - .0005"	.125"
G ₂ -2	.2980" + .0000" - .0005"	none
G ₂ -3	.3080" + .0000" - .0005"	none

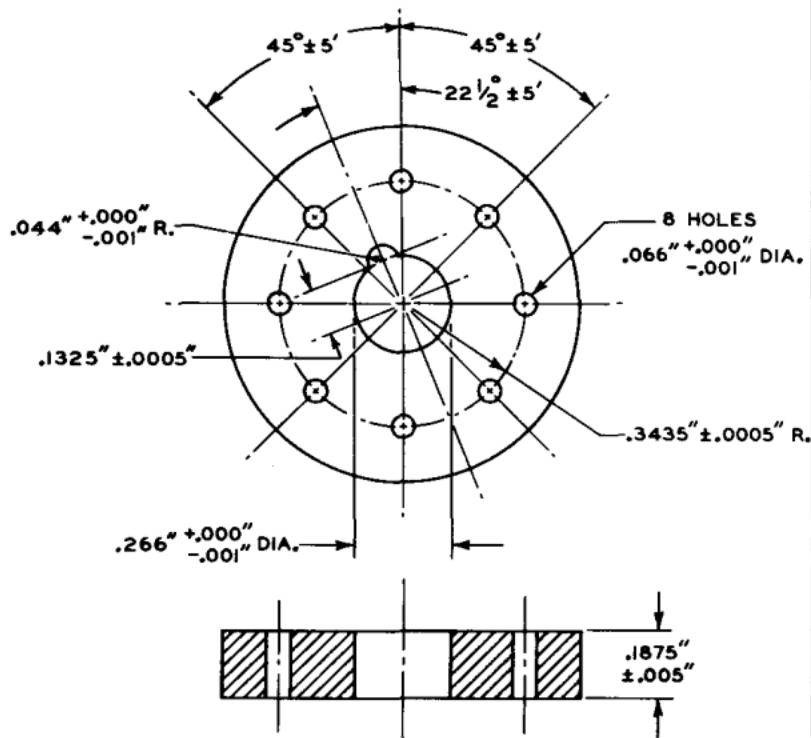GAUGE SKETCH G₃

TOLERANCES ARE NOT CUMULATIVE

92CS-7975

12-56


CE-86358

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

-7975

RCA
4X150A

AVERAGE PLATE CHARACTERISTICS

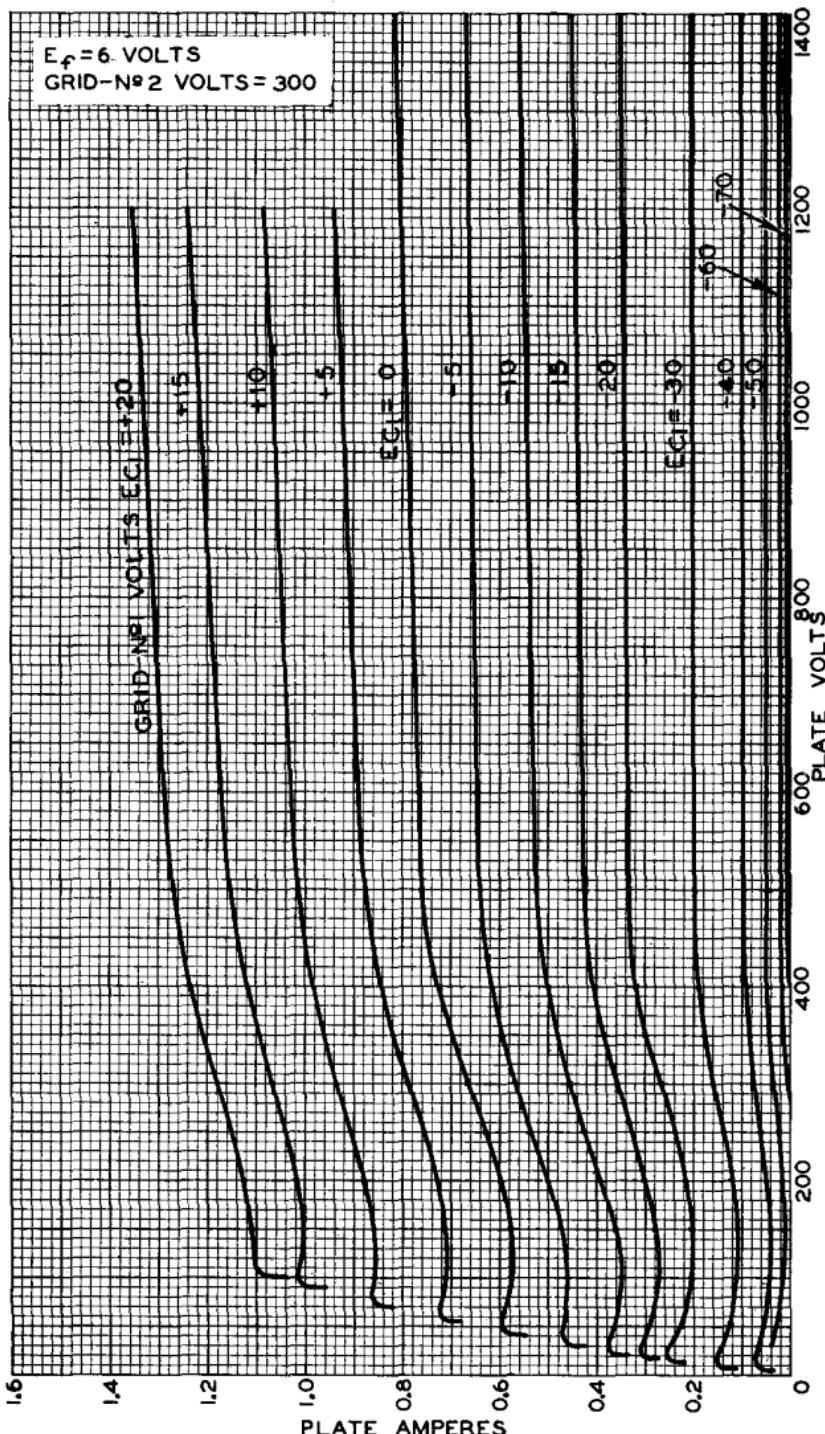


TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7950

4X150A

4X150A

AVERAGE CONSTANT-CURRENT CHARACTERISTICS

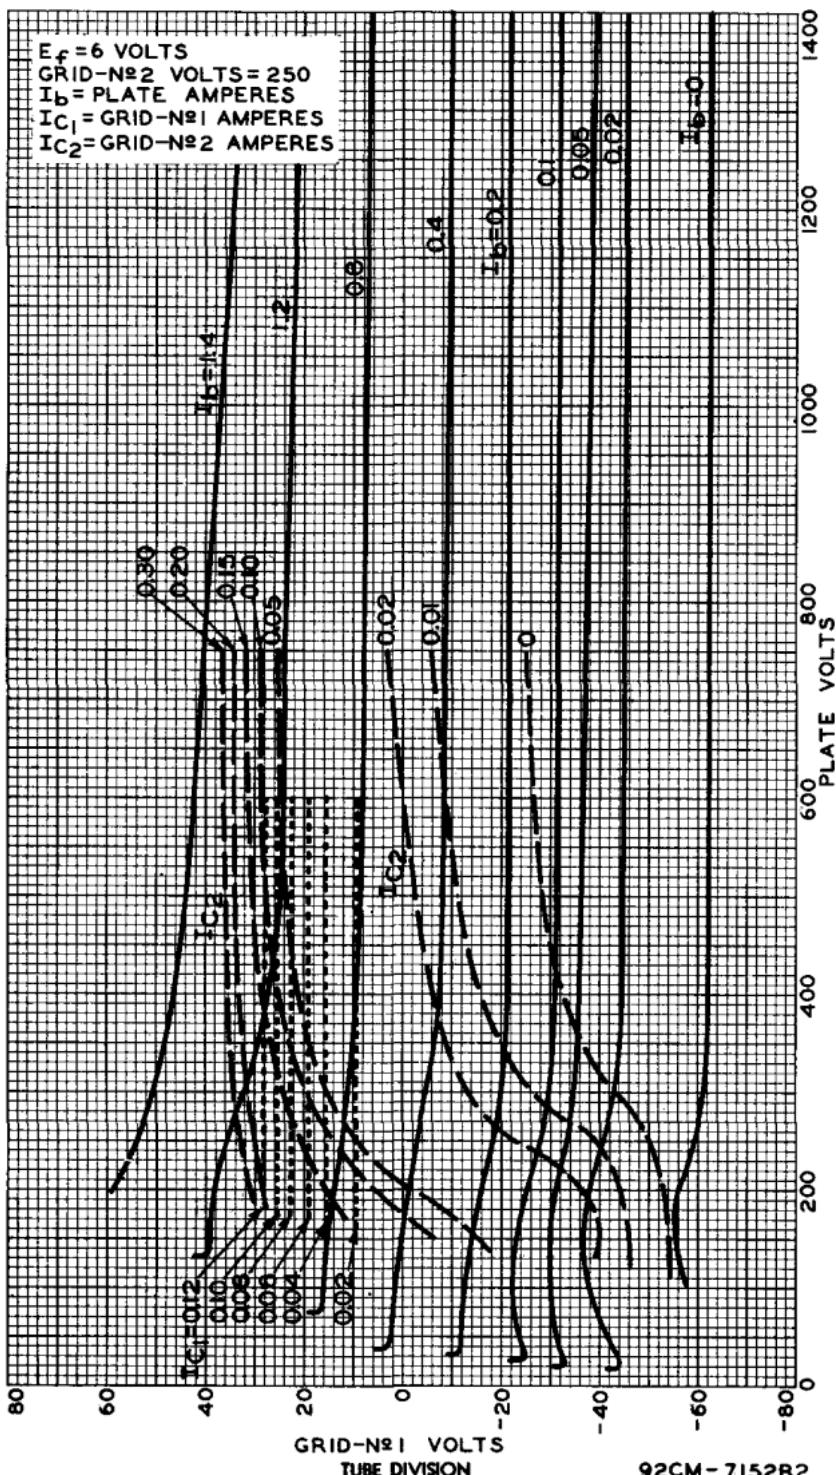



4X150A

BEAM POWER TUBE

4X150A

TYPICAL CHARACTERISTICS

