



5AS4-A

5AS4-A

FULL-WAVE VACUUM RECTIFIER

GENERAL DATA

Electrical:


Filament, Coated:

Voltage 5 ac volts
 Current 3 amp

Mechanical:


Mounting Position Vertical, base up or down, or
 Horizontal with pins 1 and 4 in vertical plane
 Maximum Overall Length 4-1/4"
 Maximum Seated Length 3-11/16"
 Maximum Diameter 1-9/16"
 Bulb T12
 Base Short Medium-Shell Octal 8-Pin
 with External Barriers, Style B (JETEC No. B8-118),
 or Short Medium-Shell Octal 5-Pin
 with External Barriers, Style B (JETEC No. B5-121)
 Basing Designation for BOTTOM VIEW 5T

Pin 1 - No Connection
 Pin 2 - Filament
 Pin 3 - Same as Pin 1
 Pin 4 - Plate No. 2



Pin 5 - Same as Pin 1
 Pin 6 - Plate No. 1
 Pin 7 - Same as Pin 1
 Pin 8 - Filament

MAXIMUM RATINGS, TYPICAL OPERATION, and CURVES
 for Type 5AS4-A are the same as those shown for Type 5U4-GB

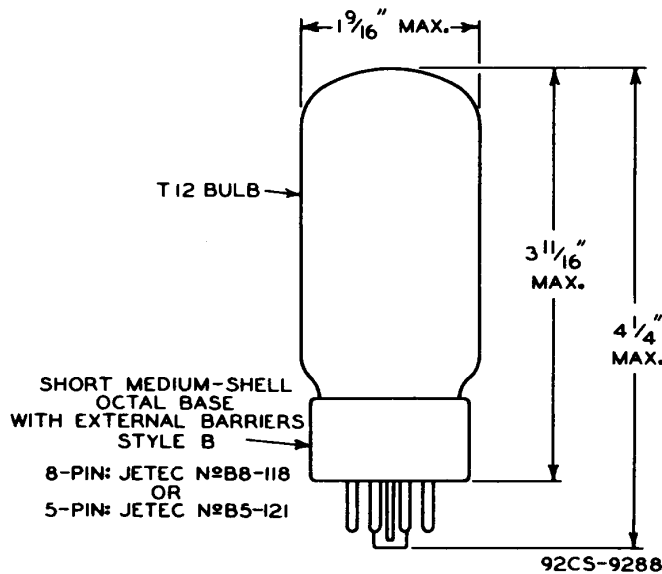

On the 5-pin base, pins 3, 5, and 7 are omitted.